

LIGHTING COLLECTION



SPECCHI
MIRRORS
LIGHTING

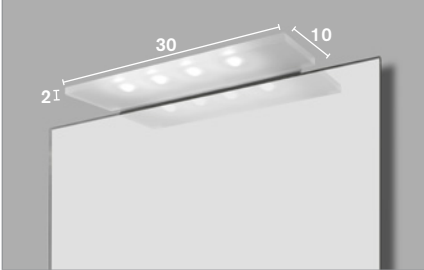
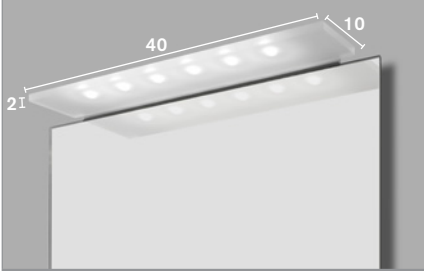
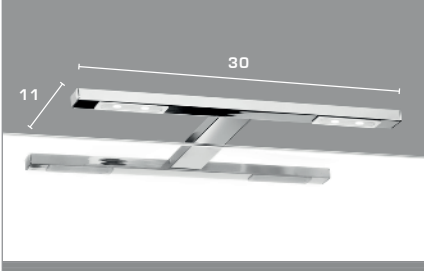
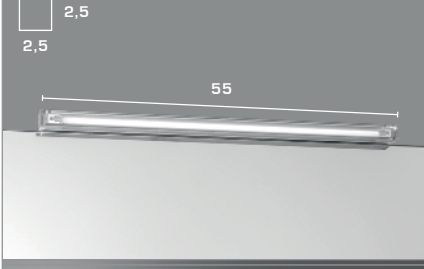
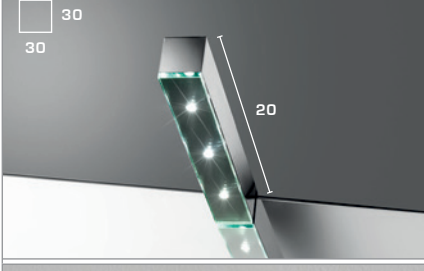
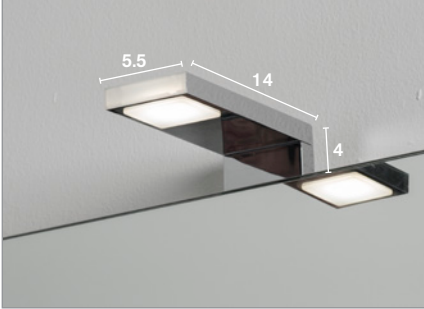
ARTELINEA
FIRENZE 1962

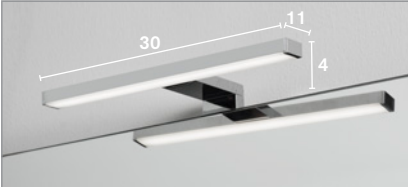
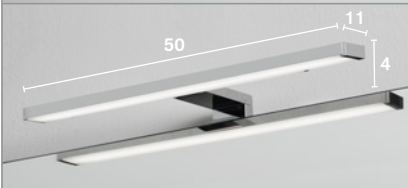
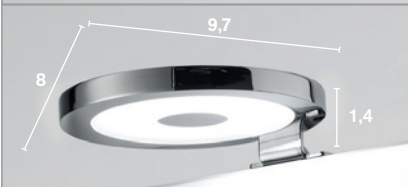
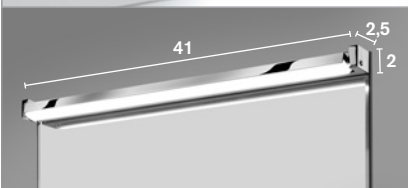
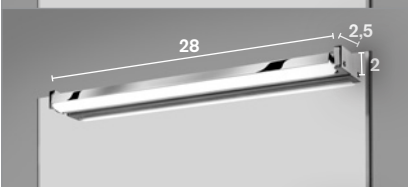
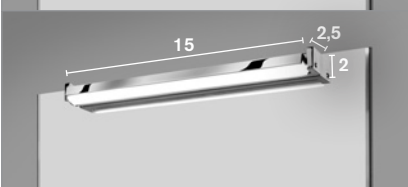
ILLUMINAZIONE UNIVERSALE DA APPLICARE ALLO SPECCHIO ARTELINEA

UNIVERSAL LIGHTING FOR ARTELINEA MIRRORS

ILUMINACIÓN UNIVERSAL PARA APLICAR EN LOS ESPEJOS ARTELINEA

Design Arte L. Studio

	W. 204	Faretto in cristallo con luce a led 4x1w 4000°K 220V da applicare allo specchio. Su richiesta luce calda 2700°K. <i>Crystal spotlight with 4x1W 4000°K 220V LEDs to be fitted to mirror. 2700°K warm light upon request.</i> Aplique de cristal con luz a led 4 x 1w 4000°K 220V para instalar en el espejo. Sobre pedido luz cálida 2700°K.	
	W. 206	Faretto in cristallo con luce a led 6x1w 4000°K 220V da applicare allo specchio. Su richiesta luce calda 2700°K. <i>Glass spotlight with 6x1W 4000°K 220V LEDs to be fitted to mirror. 2700°K warm light upon request.</i> Aplique de cristal con luz a led 6 x 1w 4000°K 220V para instalar en el espejo. Sobre pedido luz cálida 2700°K.	
	W. 220	Faretto in acciaio inox con luce a led 4x1w 4000°K 220V da applicare allo specchio. Su richiesta luce calda 3000°K. <i>Stainless steel spotlight with 4x1W 4000°K 220V LEDs to be fitted to mirror. 3000°K warm light upon request.</i> Aplique de acero inox con luz a led 4 x 1w 4000°K 220V para instalar en el espejo. Sobre pedido luz cálida 3000°K.	
	W. 250	Faretto in policarbonato trasparente con luce al neon 13W - 220V da applicare allo specchio. <i>Spotlight in transparent polycarbonate with neon light 13W - 220V to be fitted to mirror.</i> Aplique de policarbonato transparente con luz neón 13w – 220V para instalar en el espejo.	
	W. 820	Faretto con luce a led 3X1W 4000°K 220V da applicare allo specchio. <i>Spotlight with 3X1W 4000°K 220V to be fitted to mirror.</i> Aplique luz a led 3 x 1w 4000°K 220V para instalar en el espejo.	
	W. 230	Faretto cromato con lampada led 4200°K/230V, 5.7W, 50Hz da applicare allo specchio. <i>Chrome-plated spotlight with 4200°K/230V, 5.7W, 50Hz LEDs to be fitted to mirror.</i> Aplique cromado con lámpara led 4200°K / 230V, 5.7W, 50 Hz, para instalar en el espejo.	

	W.240	Faretto con luce a led 4200°K/230V, 4,5W, 50 Hz da applicare allo specchio. <i>Spotlight with LED lighting 4200°K/230V, 4,5W, 50Hz to be fitted to mirror.</i> Aplicue con luz a led 4200°K / 230V, 4,5W, 50 Hz para instalar en el espejo.	
	W.260	Faretto con luce a led 4200°K/230V, 7W, 50Hz da applicare allo specchio. <i>Spotlight with LED lighting 4200°K/230V, 7W, 50Hz to be fitted to mirror.</i> Aplicue con luz a led 4200°K / 230V, 7W, 50Hz para instalar en el espejo.	
	W.270	Faretto cromato con LED da 4.5 W. Luce 4000°K - 350 Lm. <i>Chrome-plated spotlight with LED lighting with 4,5 W. 4000°K - 350Lm lighting.</i> Aplicue cromado con LED de 4,5W. Luz 4000°K - 350 Lm.	
	W.430	Faretto in alluminio finitura cromata con diffusore orientabile in opalina da applicare sullo specchio. Luce led 4000°K, 24V DC, 5,5W, CRI>95, 409 Lm. <i>Aluminium adjustable spotlight in chromed finish with opaline details to be fitted to mirror. LED lighting 4000°K, 24V DC, 5,5W, CRI>95, 409 Lm.</i> Aplicue de aluminio acabado cromado con difusor orientable opalizado para instalar sobre el espejo. Luz led 4000°K, 24V DC, 5,5W, CRI>95, 409 Lm.	
	W.440	Faretto in alluminio finitura cromata con diffusore orientabile in opalina da applicare sullo specchio. Luce led 4000°K, 24V DC, 3,5W, CRI>95, 272 Lm. <i>Aluminium adjustable spotlight in chromed finish with opaline details to be fitted to mirror. LED lighting 4000°K, 24V DC, 3,5W, CRI>95, 272 Lm.</i> Aplicue de aluminio acabado cromado con difusor orientable opalizado para instalar sobre el espejo. Luz led 4000°K, 24V DC, 3,5W, CRI>95, 272 Lm.	
	W.450	Faretto in alluminio finitura cromata con diffusore orientabile in opalina da applicare sullo specchio. Luce led 4000°K, 24V DC, 1,5W, CRI>95, 109 Lm. <i>Aluminium adjustable spotlight in chromed finish with opaline details to be fitted to mirror. LED lighting 4000°K, 24V DC, 1,5W, CRI>95, 109 Lm.</i> Aplicue de aluminio acabado cromado con difusor orientable opalizado para instalar sobre el espejo. Luz led 4000°K, 24V DC, 1,5W, CRI>95, 109 Lm.	

PENDOLARI DA SOFFITTO*HANGING CEILING LIGHTING*

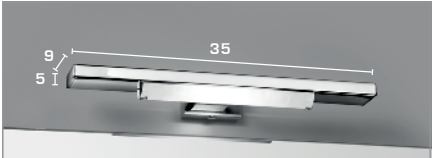
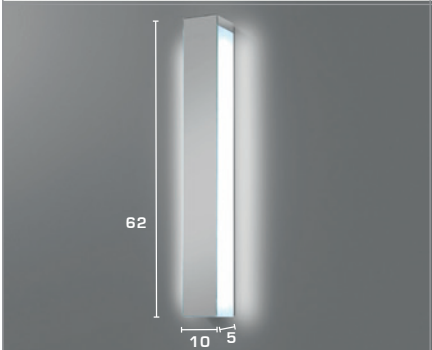
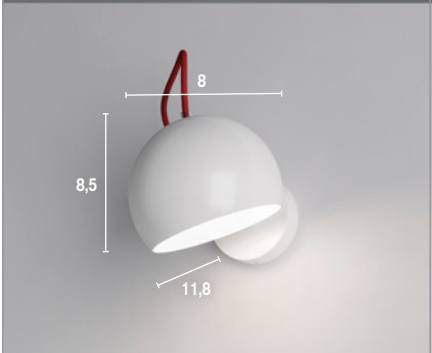
LAMPARAS DE TECHO

	W. 300	Lampada con luce a led 4000°K/ 230V, 14W. Vetro sfera ø 150mm bianco latte. <i>Lamp with LED lighting 4000°K/ 230V, 14W. ø 150mm round white glass lamp.</i> Lámpara con luz a led 4000°K / 230V, 14W. Globo cristal de 150mm blanco leche.	
	W. 350	Lampada con luce a led 4000°K/ 230V, 14W. Vetro sfera ø 200 mm bianco latte. <i>Lamp with LED lighting 4000°K/ 230V, 14W. ø 200mm round white glass lamp.</i> Lámpara con luz a led 4000°K / 230V, 14W. Globo cristal de 200mm blanco leche.	



ILLUMINAZIONE UNIVERSALE DA APPLICARE A PARETE

UNIVERSAL LIGHTING TO BE FITTED TO WALL

ILUMINACIÓN UNIVERSAL PARA INSTALAR EN LA PARED.

	W. 150	Faretto a luce alogena - 100 watt - 220V. Volt da applicare a parete. <i>100W 220V halogen spotlight to be fitted to wall.</i> Aplique luz halògena 100W 220V pars instalar en la pared.	
	W. 140	Lampada verticale in plexiglass con illuminazione a led 5500°K laterale e frontale a specchio. Trasformatore 220V. <i>5500°K LED light in plexiglass with mirrored front. 220V transformer.</i> Lámpara vertical en plexiglass con iluminación a led 5500°K lateral y frontal a espejo. Transformador 220V.	
	W. 460	Lampada total white con base a muro completa di lampada Led 12W 230V 4000°K 1000Lm. <i>Total white lamp to be fitted to the wall with LED light 12W 230V 4000°K 1000Lm.</i> Lámpara totalmente blanca con base a pared con luz led 12W 230V 4000°K 1000 Lm.	
	W. 163	Faretto in ottone cromato a neon 13W 220V da applicare a parete retrospecchio. <i>Wall spotlight in chromed brass with neon 13W 220V to be fitted to wall behind the mirror.</i> Aplique de latón cromado con neón 13W 220V para instalar en la pared detrás del espejo.	
	W410	Lampada Led 6W 230V AC E27 2700°K 810Lm a goccia trasparente. Struttura tubolare diam.4 mm. Finitura Bianca o Nera. <i>Transparent drop LED lamp 6W 230V AC E27 2700°K 810Lm. 4mm tubular structure. White or black finish.</i> Lámpara Led 6W 230V AC E27 2700°K 810Lm trasparente. Estructura tubular diám. 4 mm. Acabado Blanca o Negra.	
	W420	Lampada Led 6W 230V AC E27 2700°K 810Lm a goccia trasparente. Struttura tubolare diam.4 mm. Finitura Bianca o Nera. <i>Transparent drop LED lamp 6W 230V AC E27 2700°K 810Lm. 4mm tubular structure. White or black finish.</i> Lámpara Led 6W 230V AC E27 2700°K 810Lm trasparente. Estructura tubular diám. 4 mm. Acabado Blanca o Negra.	

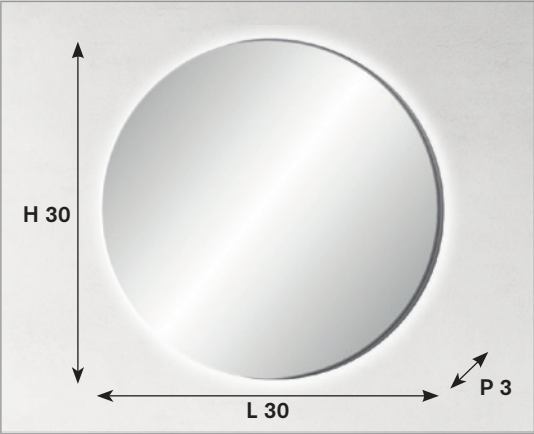
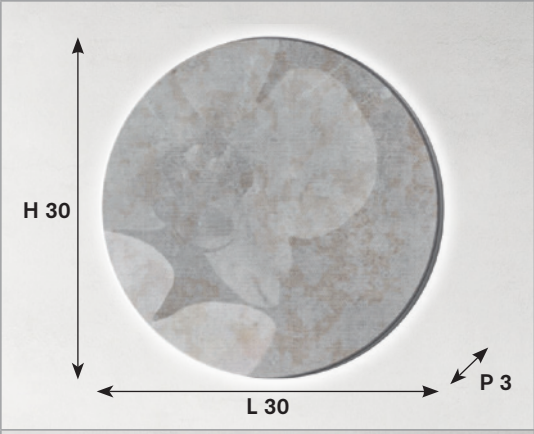
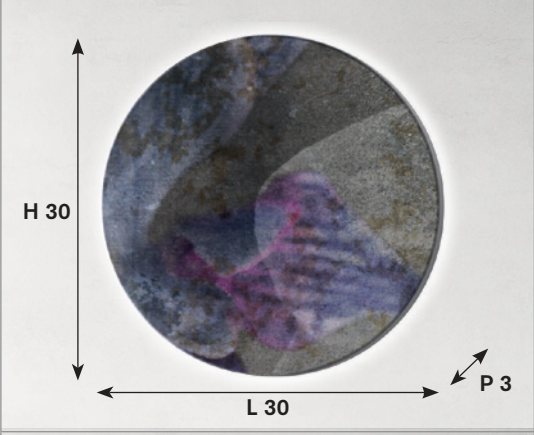
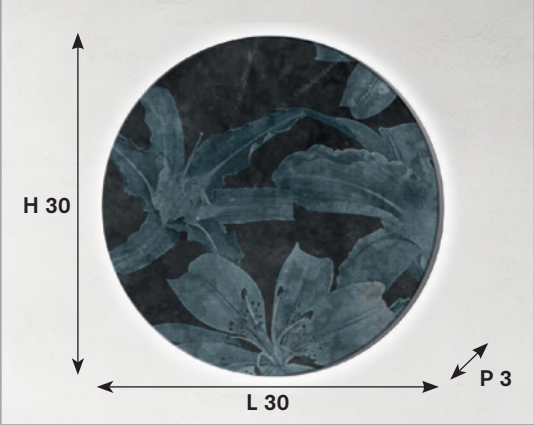
ILLUMINAZIONE UNIVERSALE DA APPLICARE A PARETE
UNIVERSAL LIGHTING TO BE FITTED TO WALL
ILUMINACIÓN UNIVERSAL PARA INSTALAR EN LA PARED.

	W. 470	Lampada Led da parete orientabile in alluminio versione: MARRONE/ORO, BIANCA/ORO, MARRONE/CROMO, BIANCA/CROMO, 7 W - 2700°K - CRI80 - 350Lm <i>Adjustable LED lamp in aluminium. Available finishes: MARRONE/ORO, BIANCA/ORO, MARRONE/CROMO, BIANCA/CROMO, 7 W - 2700°K - CRI80 - 350Lm</i> Lámpara Led a pared orientable de aluminio, versiones: MARRÓN/ORO, BLANCA/ORO, MARRÓN/CROMO, BLANCA/CROMO, 7W – 2700 °K – CRI80 – 350 Lm. 	
	W. 480	Lampada Led doppia da parete orientabile in alluminio versione: MARRONE/ORO, BIANCA/ORO, MARRONE/CROMO, BIANCA/CROMO, 14 W - 2700°K - CRI80 - 613Lm <i>Adjustable double LED lamp in aluminium. Available finishes: MARRONE/ORO, BIANCA/ORO, MARRONE/CROMO, BIANCA/CROMO, 14 W - 2700°K - CRI80 - 613Lm</i> Lámpara Led doble a pared orientable de aluminio, versiones: MARRÓN/ORO, BLANCA/ORO, MARRÓN/CROMO, BLANCA/CROMO, 14W – 2700 °K – CRI80 – 613 Lm. 	



SPECCHI
RI-TRATTI/RIFLESSI
LIGHTING

ILLUMINAZIONE UNIVERSALE DA APPLICARE A PARETE
UNIVERSAL LIGHTING TO BE FITTED TO WALL
ILUMINACIÓN UNIVERSAL PARA INSTALAR EN LA PARED.

 A circular lamp with a mirror finish. Dimensions: H 30, L 30, P 3.	W.490	Lampada con luce perimetrale indiretta a led 6W, 220V e superficie frontale a specchio. Di serie LUCE NATURALE 4000°K, su richiesta LUCE CALDA 2700°K e LUCE FREDDA 5500°K. <i>Lamp with indirect perimetral LED lighting 6W, 220V and front surface in mirror finish. 4000°K NATURAL LIGHT as standard, 2700°K warm light and 5500°K COLD LIGHT upon request.</i> Lámpara con luz perimetral indirecta a led 6W, 220V y superficie frontal a espejo. De serie LUZ NATURAL 4000 °K, sobre pedido LUZ CÁLIDA 2700 °K o LUZ FRÍA 5500 °K.	
 A circular lamp with a CHERRY finish. Dimensions: H 30, L 30, P 3.	W.500	Lampada con luce perimetrale indiretta a led 6W, 220V e superficie frontale in vetro con decoro CHERRY. Di serie LUCE NATURALE 4000°K, su richiesta LUCE CALDA 2700°K e LUCE FREDDA 5500°K. <i>Lamp with indirect perimetral LED lighting 6W, 220V and front surface in CHERRY finish. 4000°K NATURAL LIGHT as standard, 2700°K warm light and 5500°K COLD LIGHT upon request.</i> Lámpara con luz perimetral indirecta a led 6W, 220V y superficie frontal de cristal decorado CHERRY. De serie LUZ NATURAL 4000 °K, sobre pedido LUZ CÁLIDA 2700 °K o LUZ FRÍA 5500 °K.	
 A circular lamp with a CALYPSO finish. Dimensions: H 30, L 30, P 3.	W.510	Lampada con luce perimetrale indiretta a led 6W, 220V e superficie frontale in vetro con decoro CALYPSO. Di serie LUCE NATURALE 4000°K, su richiesta LUCE CALDA 2700°K e LUCE FREDDA 5500°K. <i>Lamp with indirect perimetral LED lighting 6W, 220V and front surface in CALYPSO finish. 4000°K NATURAL LIGHT as standard, 2700°K warm light and 5500°K COLD LIGHT upon request.</i> Lámpara con luz perimetral indirecta a led 6W, 220V y superficie frontal de cristal decorado CALYPSO. De serie LUZ NATURAL 4000 °K, sobre pedido LUZ CÁLIDA 2700 °K o LUZ FRÍA 5500 °K.	
 A circular lamp with a GARDEN finish. Dimensions: H 30, L 30, P 3.	W.520	Lampada con luce perimetrale indiretta a led 6W, 220V e superficie frontale in vetro con decoro GARDEN. Di serie LUCE NATURALE 4000°K, su richiesta LUCE CALDA 2700°K e LUCE FREDDA 5500°K. <i>Lamp with indirect perimetral LED lighting 6W, 220V and front surface in GARDEN finish. 4000°K NATURAL LIGHT as standard, 2700°K warm light and 5500°K COLD LIGHT upon request.</i> Lámpara con luz perimetral indirecta a led 6W, 220V y superficie frontal de cristal decorado GARDEN. De serie LUZ NATURAL 4000 °K, sobre pedido LUZ CÁLIDA 2700 °K o LUZ FRÍA 5500 °K.	